


Rohs Compliance


REV	DESCRIPTION	DATE	BY

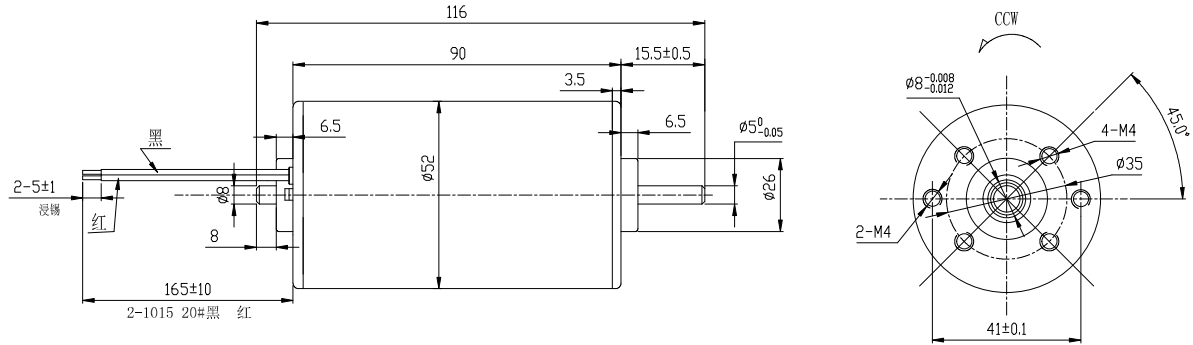

Notes:

- Voltage with Frequency (电压和频率): DC12V
- Rotation (转向): CCW
- No-load Performance (空载性能)  
No-load Speed (空载转速): 9000±10%RPM  
No-load Current (空载电流): <2.0A  
No-load Power (空载功率):
- load Performance (负载性能)  
load Speed (负载转速):  
load Current (负载电流):  
load Power (负载功率):
- Withstand Voltage (耐压): 500V/1Ma/1Sec
- Lock Current (堵转电流):
- Lock Torque (堵转力矩):
- Lock Power (堵转功率):
- Noise (噪音): 《75Db (Distance Motor 30CM)

CIRCUIT DIAGRAM



Label content:

DD-3440D012  
MADE IN CHINA

GENERAL TOLERANCES ISO 2768-m							
Permissible deviations for linear dimensions							
Permissible deviations for basic size range							
>0.5	>3	>6	>30	>120	>400	>1000	>2000
-0.3	-0.6	-1.0	-1.6	-2.5	-4.0	-6.3	-10.0
m	H8	H7	H6	H5	H4	H3	H2
Permissible deviations for angular dimensions				Permissible deviations for broken edges (external radii, chamfer heights)			
Permissible deviations for ranges of lengths in millimeters of the shorter side of the angle concerned				Permissible deviations for basic size range			
-10	-20	-30	-40	>0.5	>3	>6	>1
m	H1'	H2'	H3'	H4'	H5'	H6'	H7'

DWN. BY	CHK. BY	APP. BY
Date(yyyymmdd)	Date(yyyymmdd)	Date(yyyymmdd)
MATERIAL:		
FINISH:		
General Tolerance ISO 2768-1 Class m (Unless specified)		TITLE
ALL DIMENSIONS ARE IN MILLIMETRES		OD-3440D012
SHENZHEN ODIN IMPORT AND EXPORT CO., LTD		DWG NO.
		OD-3440D012
		SHEET 1 OF 1

Scale: A4  SCALE 3:1  NOT SCALE